

製品仕様書

製品名称 : NP型支持脚

目次

1. 製品仕様
2. 製品形状図
3. 適応床高
4. 梱包仕様

泰成 株式会社

〒399-4102 長野県駒ヶ根市飯坂2-8-34

1. 製品仕様

1-1.支持脚

①台座

項 目	仕様・品質
ブロック部材質	JIS A 5908 (パーティクルボード) 18MR1 (M) または 18MR2 (P) F☆☆☆☆
粘着テープ材質	両面粘着テープ ブチルゴム系またはアクリル系
ナット部材質	JIS G 3131 (熱間圧延軟鋼板及び鋼帯) SPHC または JIS G 3507-1 (冷間圧造用炭素鋼-第1部:線材) SWRCH10R (相当) または JIS G 3507-2 (冷間圧造用炭素鋼-第2部:線) SWCH10R (相当) または JIS G 3505 (軟鋼線材) SWRM6 (相当) または SWRCH10R (相当)
ナット部表面処理	JIS H 8610 (電気亜鉛めっき) 3 級
寸法	2. 製品形状図参照
外観	ネジ部にキズのないこと めっき剥離のないこと
かしめトルク	14N・m 以上であること
その他	使用上支障のないこと

②支持ボルト

項 目	仕様・品質
ボルト部材質	JIS G 3445 (機械構造用炭素鋼鋼管) STKM11A (相当) または STKM12C (相当) または 溶融めっき鋼帯 (ZAM) STKM11A (相当)
ボルト部表面処理※	JIS H 8610 (電気亜鉛めっき) 3 級
防振ゴム部材質	JIS K 6386 (防振ゴム・ゴム材料の区分) A 種 硬さ 70 ± 5°
寸法	2. 製品形状図参照
外観	ネジ部にキズのないこと めっき剥離のないこと
その他	使用上支障のないこと

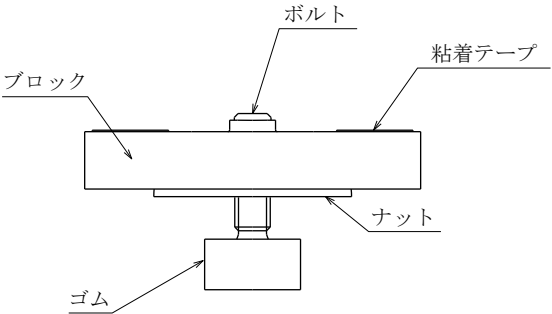
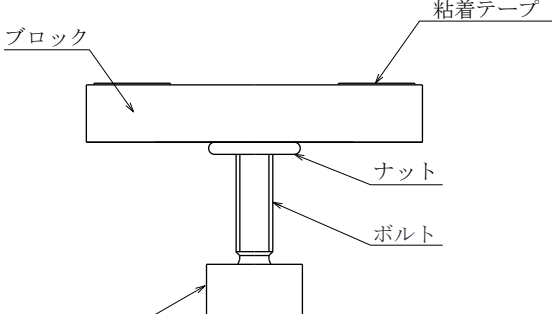
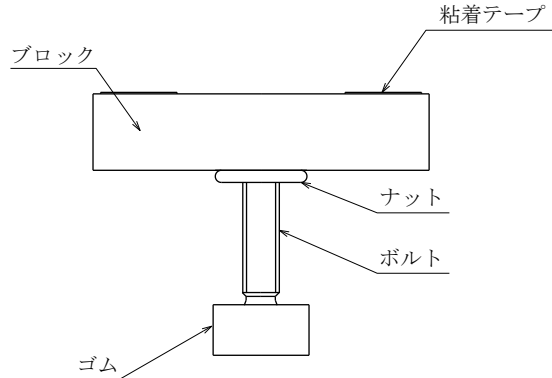
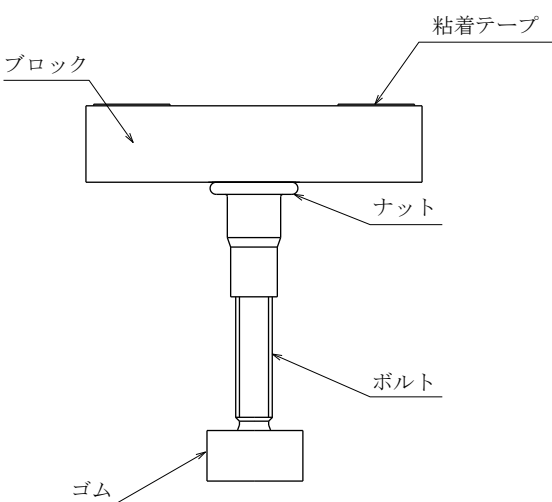
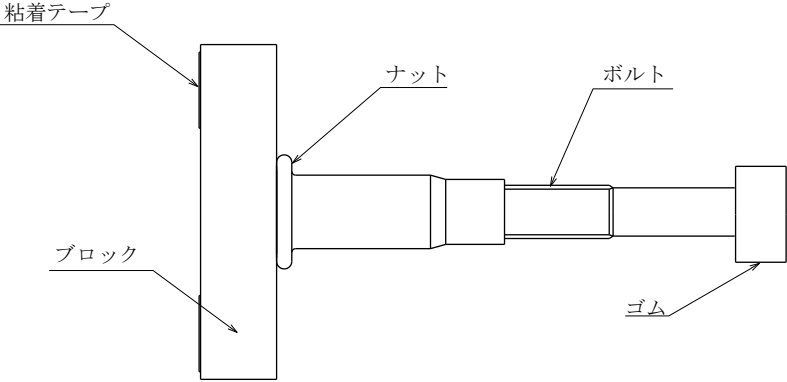
※溶融めっき鋼帯は表面処理済。

1-2.接着剤

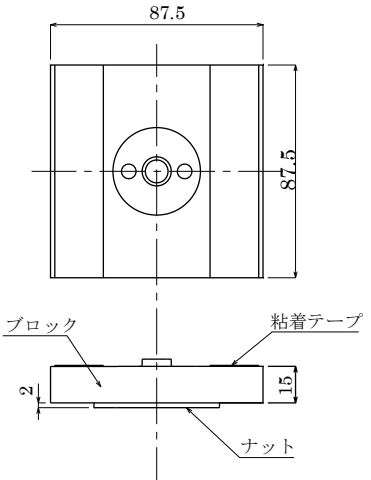
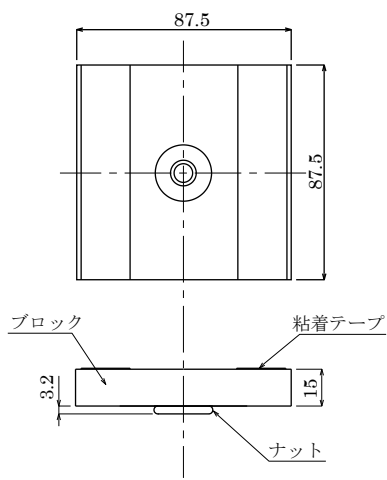
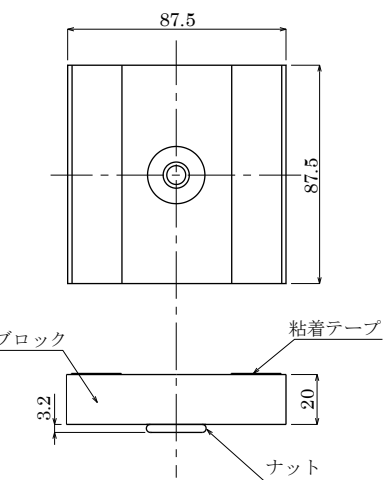
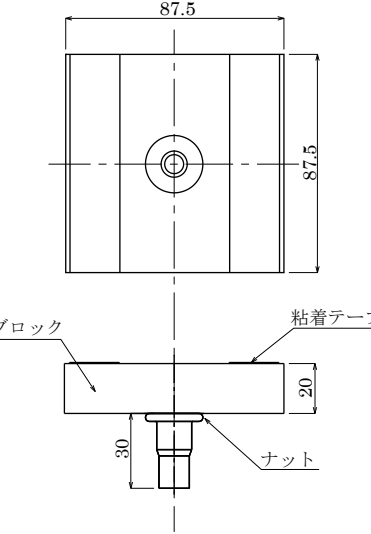
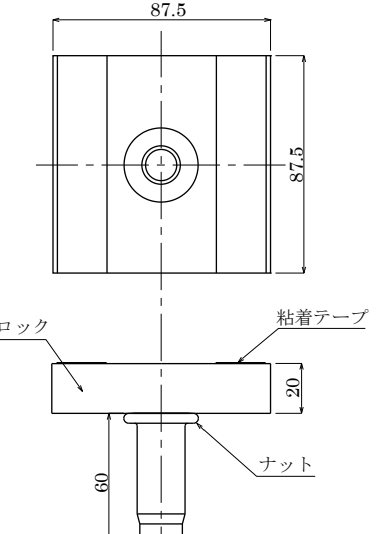
項 目	仕様・品質
材質	ポリウレタン系
寸法	400ml または 200ml
その他	シアン化合物、有機リン化合物、ヒ素及びその化合物、ホルムアルデヒド、水質汚濁防止法に係る重金属類、PCB、フェノール等の物質、トルエン、キシレン及び木材保存剤、可塑剤、防蟻剤は使用していない。

2. 製品形状図

2-1.支持脚

NP-45・50	NP-70
 Diagram of NP-45・50 support leg assembly. It shows a rectangular block (ブロック) with a bolt (ボルト) passing through its center. A nut (ナット) is positioned below the block, and a rubber foot (ゴム) is attached to the bottom of the nut. Adhesive tape (粘着テープ) is applied to the top surface of the block.	 Diagram of NP-70 support leg assembly. It shows a rectangular block (ブロック) with a nut (ナット) on its bottom surface. A bolt (ボルト) passes through the nut and is secured with a rubber foot (ゴム) at the bottom. Adhesive tape (粘着テープ) is applied to the top surface of the block.
NP-90	NP-115~215
 Diagram of NP-90 support leg assembly. It shows a rectangular block (ブロック) with a nut (ナット) on its bottom surface. A bolt (ボルト) passes through the nut and is secured with a rubber foot (ゴム) at the bottom. Adhesive tape (粘着テープ) is applied to the top surface of the block.	 Diagram of NP-115~215 support leg assembly. It shows a rectangular block (ブロック) with a nut (ナット) on its bottom surface. A bolt (ボルト) passes through the nut and is secured with a rubber foot (ゴム) at the bottom. Adhesive tape (粘着テープ) is applied to the top surface of the block.
NP-230~1070	
 Diagram of NP-230~1070 support leg assembly. It shows a vertical rectangular block (ブロック) with adhesive tape (粘着テープ) on its top surface. A nut (ナット) is attached to the side of the block. A bolt (ボルト) passes through the nut and is secured with a rubber foot (ゴム) at the bottom.	

2-2.台座

NP-45・50	NP-70	NP-90
		
NP-115~215	NP-230~1070	
		

2-3.支持ボルト

NP-45~215

Diagram illustrating the dimensions and components of the NP-45~215 bolt assembly. The assembly consists of a bolt (W3/8) passing through a base plate (φ26) and a rubber gasket (ゴム). The base plate has a height of 13.7. The bolt has a total length L (ボルト長さ) and a threaded section length A (有効ねじ).

品 番	L	A
NP- 45	30	18.5
NP- 50	40	28.5
NP- 70	50	38.5
NP- 90	60	48.5
NP-115	60	48.5
NP-125	90	78.5
NP-155	120	87.0
NP-185	150	87.0
NP-215	180	87.0

NP-230~1070

Diagram illustrating the dimensions and components of the NP-230~1070 bolt assembly. The assembly consists of a bolt (M14) passing through a base plate (φ26) and a rubber gasket (ゴム). The base plate has a height of 13.7. The bolt has a total length L (ボルト長さ) and a threaded section length of 100以上 (有効ねじ).

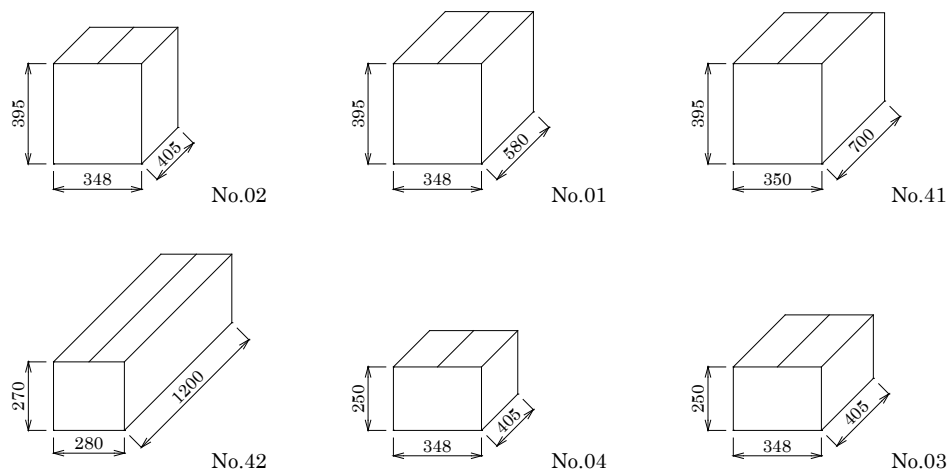
品 番	L
NP- 230	185
NP- 290	245
NP- 350	305
NP- 410	365
NP- 470	425
NP- 530	485
NP- 590	545
NP- 650	605
NP- 710	665
NP- 770	725
NP- 830	785
NP- 890	845
NP- 950	905
NP-1010	965
NP-1070	1025

3. 適応床高（床パネル厚20mm時の床パネル天端までの高さ）

品 番	適応床高(mm)
NP- 45	43 ~ 54
NP- 50	49 ~ 64
NP- 70	59 ~ 90
NP- 90	69 ~ 105
NP- 115	90 ~ 132
NP- 125	99 ~ 162
NP- 155	129 ~ 192
NP- 185	159 ~ 222
NP- 215	189 ~ 252
NP- 230	195 ~ 280
NP- 290	255 ~ 340
NP- 350	315 ~ 400
NP- 410	375 ~ 460
NP- 470	435 ~ 520
NP- 530	495 ~ 580
NP- 590	555 ~ 640
NP- 650	615 ~ 700
NP- 710	675 ~ 760
NP- 770	735 ~ 820
NP- 830	795 ~ 880
NP- 890	855 ~ 940
NP- 950	915 ~ 1000
NP-1010	975 ~ 1060
NP-1070	1035 ~ 1120

4. 梱包仕様

4-1. 梱包外観



4-2. 梱包重量

品番	梱包重量(kg/箱)	入数	梱包箱(mm)	
NP- 45	16.7	100 セット	No.02 405×348×395	
NP- 50	17.0			
NP- 70	15.0			
NP- 90	18.5			
NP- 115	16.1	80 セット	No.01 580×348×395	
NP- 125	16.9			
NP- 155	18.0			
NP- 185	19.2			
NP- 215	13.2	50 セット		
NP- 230	17.3			
NP- 290	19.1			
NP- 350	16.8	40 セット		
NP- 410	18.3			
NP- 470	19.7			
NP- 530	16.4	30 セット		No.41 700×350×395
NP- 590	17.5			
NP- 650	18.5			
NP- 710	13.8	20 セット	No.42 1200×280×270	
NP- 770	14.5			
NP- 830	15.2			
NP- 890	15.9			
NP- 950	16.6			
NP-1010	17.3			
NP-1070	18.0			

品 番	梱包重量(kg/箱)	入数	梱包箱(mm)
NP-45h	8.9	50 セット	No.04 405×348×250
NP-50h	9.0		
NP-70h	7.9		
NP-90h	9.9		
NP-115h	8.7	40セット	No.03 580×348×250
NP-125h	9.1		
NP-155h	9.7		
NP-185h	10.3		
NP-215h	7.4	25セット	
NP-230h	9.3		
NP-290h	10.2		
NP-350h	9.2	20 セット	
NP-410h	9.9		
NP-470h	10.6		

仕様は予告なく変更することがあります。